



Mobile Media Solutions

PXA-H800 V1.003 atnaujinimas



ALPINE ELECTRONICS GmbH

Wilhelm-Wagenfeld-Straße 1-3,
80807 München, Germany
Phone 089-32 42 640

ALPINE ELECTRONICS OF U.K., LTD.

Alpine House
Fletchamstead Highway, Coventry CV4 9TW, U.K.
Phone 0870-33 33 763

ALPINE ELECTRONICS FRANCE S.A.R.L.

(RCS PONTOISE B 338 101 280)
98, Rue de la Belle Etoile, Z.I. Paris Nord II,
B.P. 50016, 95945 Roissy Charles De Gaulle
Cedex, France
Phone 01-48638989

ALPINE ITALIA S.p.A.

Viale C. Colombo 8, 20090 Trezzano
Sul Naviglio (MI), Italy
Phone 02-484781

ALPINE ELECTRONICS DE ESPAÑA, S.A.

Portal de Gamarra 36, Pabellón, Pabellón, 32
01013 Vitoria (Alava)-APDO 133, Spain
Phone 945-283588

Įvadas

Šiame vadove aprašomos PXA-H800 programinės įrangos atnaujinimo procedūros.

Perspėjimas



Prieš pradėdant programinės įrangos procedūrą, įsitikinkite, kad esate išsaugoję visus garso nustatymus. Visi nustatymai, atnaujinimo procedūros metu, bus ištrinti.

Reikalavimai

- Didelės spartos interneto ryšys.

Atnaujinimo instrukcijos

1. Atsisiųskite atnaujinimo bylą (.zip)
2. Išarchyvuokite bylą ant darbastalio.
3. Prijunkite PXA-H800 prie kompiuterio ir paleiskite “Sound Manager” programą.
4. Pasirinkite “Option / Software download”.


The screenshot displays the ALPINE PXA-H800 Sound Manager software interface. The main window is titled "ALPINE PXA-H800 Sound Manager - X-Over". The interface is divided into several sections:

- Menu:** File(F), Option(O), Version Information (V) Ctrl + V, Software Download (D) Ctrl + D.
- Shortcuts:** X-Over, TCR (ON/OFF), EQ Setup (G.EQ, P.EQ, OFF).
- Default/Source:** Default (ON/OFF), Source (Auxiliary (AI-NET (HU))).
- System Status:** ONLINE, Temperature (43.5°C), Voltage (110.3V), MIC (12.7V).
- Channel Select:** Front High, Front Low (selected), Rear, SubW.
- Frequency Response Graphs:** Two graphs showing gain in dB vs frequency in Hz (log scale). The top graph is for the "Front Low" group, and the bottom graph is for the "Rear" group. Both show a red curve that rises from -24 dB at 100 Hz to 0 dB at 1 kHz.
- Channel Settings:** L ch. and R ch. settings for HPF (20.0 Hz), LPF (400.0 Hz), Level (-6.5 dB), and Phase (180°).
- Buttons:** Show All Curves, Hide Other Curves, Show All Data, Ch. Flat, All Reset, Close Window.


5. Spauskite "OK".




6. Pasirinkite išsarchyvuotą bylą. Bylos vardas bus "V1003_Main_10AP_Bin_CRC.bin", spauskite "Open".

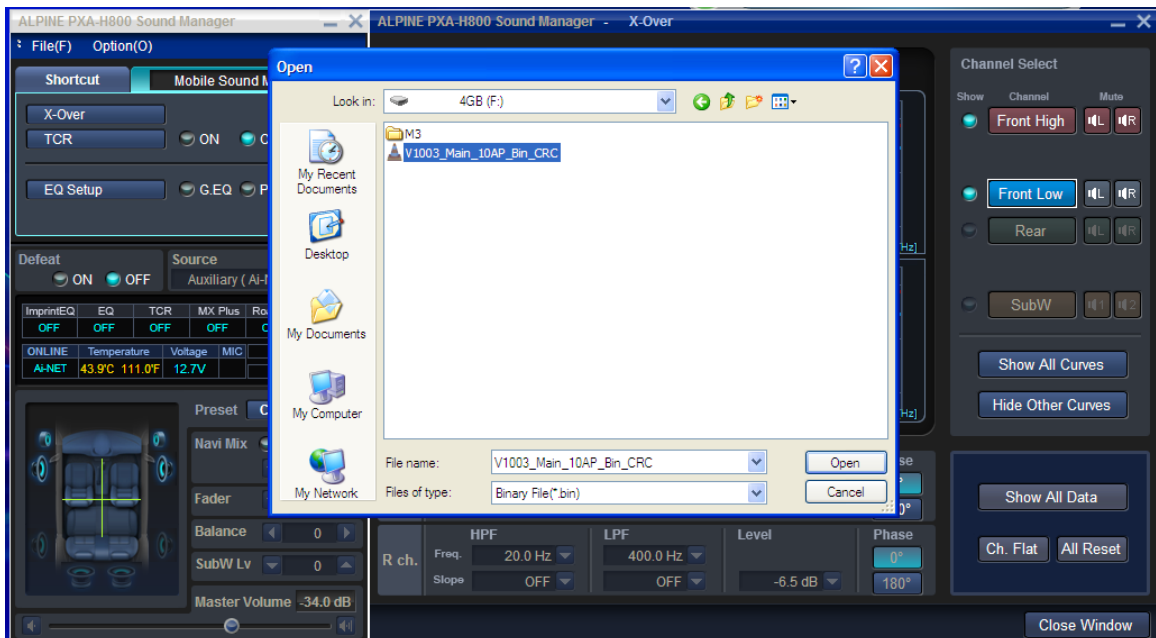

7. Spauskite OK, atnaujinimo procedūra prasidės. Procesas gali užtrukti panašiai 10 minučių.

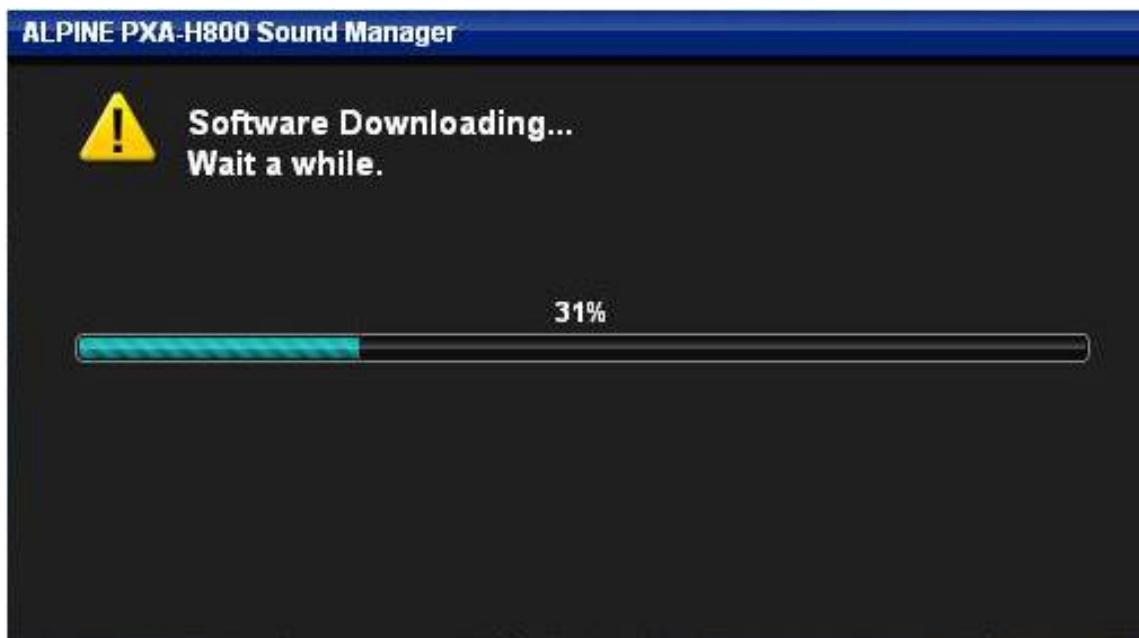

8. Pasibaigus atnaujinimo procesui, sekite nurodymus.

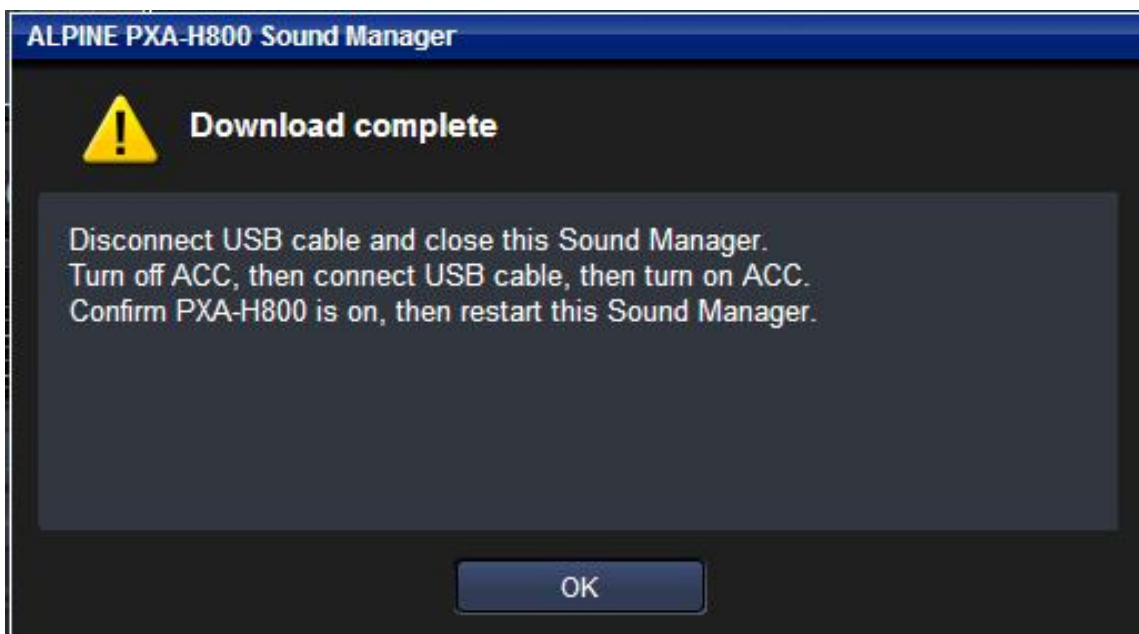

9. Perkraunant "Sound Manager" programą, įsitikinkite, kad PXA-H800 programinės įrangos versija yra V1.003.

10. Atnaujinimas baigtas.